

調光レンズ プラスチック1.55 非球面設計

チェンジAS つつるコート

UV380カット

スピーディに発色（最大濃度まで約1分）

練り込みタイプの調光レンズ


Photochromic lens
Change

基本仕様

屈折率	1.55
比重	1.19
アップベ数	40
設計	非球面設計

カラーラインナップ

ブラウン (BR)
グレー (GY)

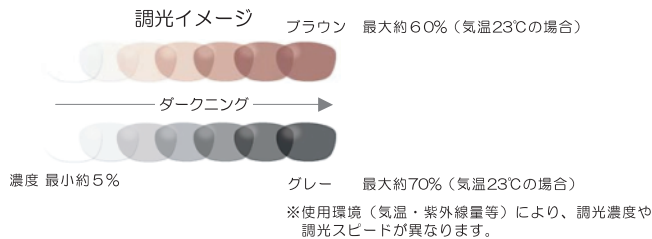

つつるコート

度数 (-)	球面	乱視 (-)					
		0.25	.50	.75	1.00	.25	.50
0.00							
.25							
.50				70			
.75							
1.00							
.25							
.50							
.75							
2.00							
.25							
.50							
.75							
3.00							
.25							
.50							
.75							
4.00							
.25							
.50							
.75							
5.00							
.25							
.50							
.75							
6.00							

度数 (+)	球面	乱視 (+)					
		0.25	.50	.75	1.00	.25	.50
0.00							
.25							
.50				65			
.75							
1.00							
.25							
.50							
.75							
2.00							
.25							
.50							
.75							
3.00							

混合乱視 (MIX)							
C- S+	乱視						
	0.25	.50	.75	1.00	.25	.50	.75
0.25							
.50							
.75							
1.00							
1.25							
1.50							
1.75							
2.00							

在庫範囲

ペア単位にてご注文下さい。

在庫品(非球面設計)と 特注品(球面設計)の
ペア注文はお受けできませんので、ご注意ください。

特注加工

プリズム	×
偏心	×
外径指定	×
厚み指定	×
UVカット	UV380標準