

調光レンズ プラスチック1.55 非球面設計

チェンジAS つつるコート

UV380カット
スピーディに発色（最大濃度まで約1分）
練り込みタイプの調光レンズ


Photochromic lens
Change

基本仕様

屈折率	1.55
比重	1.19
アップ数	40
設計	非球面設計

カラーラインナップ

ブラウン (BR)
グレー (GY)

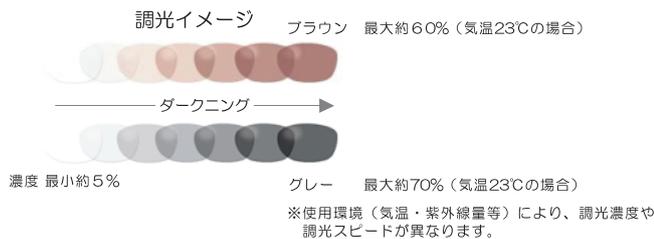

つつるコート

度数 (-)	球面	乱視 (-)								
		0.25	.50	.75	1.00	.25	.50	.75	2.00	
0.00										
.25										
.50				70						
.75										
1.00										
.25										
.50										
.75										
2.00										
.25										
.50										
.75										
3.00										
.25										
.50										
.75										
4.00										
.25										
.50										
.75										
5.00										
.25										
.50										
.75										
6.00										

度数 (+)	球面	乱視 (+)								
		0.25	.50	.75	1.00	.25	.50	.75	2.00	
0.00										
.25										
.50					65					
.75										
1.00										
.25										
.50										
.75										
2.00										
.25										
.50										
.75										
3.00										

混合乱視 (MIX)										
C- S+	0.25	乱視 (+)								
		0.50	.75	1.00	.25	.50	.75	2.00		
0.25										
.50										
.75					65					
1.00										
1.25										
1.50										
1.75										

在庫範囲

ペア単位にてご注文下さい。

在庫品(非球面設計)と 特注品(球面設計)のペア注文はお受けできませんので、ご注意ください。

特注加工

プリズム	×
偏心	×
外径指定	×
厚み指定	×
UVカット	UV380標準

調光レンズ プラスチック 単焦点 1.55 非球面非球面

