

チェンジBT MVI.67

Change Blue Tech MV I.67

調光プラスチック

遠近両用

内面累進・内面非球面

1.67

仕様

屈折率	1.67
比重	1.35
アッペ数	32
設計	内面累進・内面非球面
累進帯長	11・13・15mm
加入度数	0.75～3.50

対応コート



- つるつる
- 内面マルチ
- ミラー (シルバー・ゴールド・ブルー・レッド)

製作範囲表

度数 (-)	球面	乱視 (-)																		
		0.25	.50	.75	1.00	.25	.50	.75	2.00	.25	.50	.75	4.00							
0.00																				
.25																				
.50																				
.75																				
1.00																				
.25																				
.50																				
.75																				
2.00																				
.25																				
.50																				
.75																				
3.00																				
.25																				
.50																				
.75																				
4.00																				
.25																				
.50																				
.75																				
5.00																				
.25																				
.50																				
.75																				
6.00																				
.25																				
.50																				
.75																				
7.00																				
.25																				
.50																				
.75																				
8.00																				
.25																				
.50																				
.75																				
9.00																				

度数 (+)	球面	乱視 (+)																		
		0.25	.50	.75	1.00	.25	.50	.75	2.00	.25	.50	.75	4.00							
0.00																				
.25																				
.50																				
.75																				
1.00																				
.25																				
.50																				
.75																				
2.00																				
.25																				
.50																				
.75																				
3.00																				
.25																				
.50																				
.75																				
4.00																				
.25																				
.50																				
.75																				
5.00																				
.25																				
.50																				
.75																				
6.00																				

C(-)	S(+)	混合乱視 (MIX)																		
		0.25	.50	.75	1.00	.25	.50	.75	2.00	.25	.50	.75	4.00							
0.25																				
.50																				
.75																				
1.00																				
.25																				
.50																				
.75																				
2.00																				
.25																				
.50																				
.75																				
3.00																				
.25																				
.50																				
.75																				
4.00																				
.25																				
.50																				
.75																				
5.00																				
.25																				
.50																				
.75																				
6.00																				

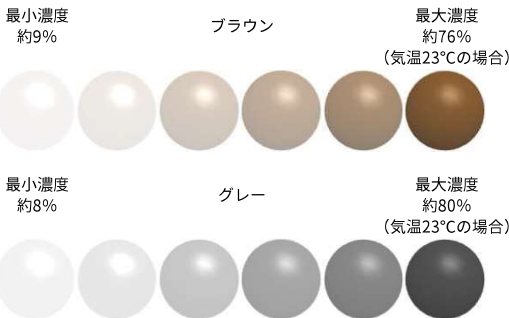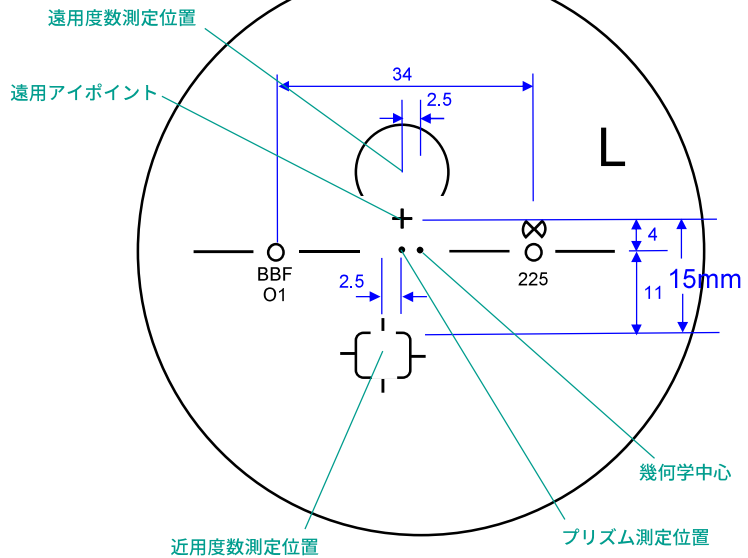

※使用環境 (気温・紫外線量等) により、調光濃度や調光スピードが異なります。

設計タイプ	隠しマーク	屈折率	累進帯長	隠しマーク
F (遠方重視)	B B F	1.67	11mm	O 1
N (近方重視)	B B N		13mm	O 3
			15mm	O 5

カラー

アリアーテ	×	
レイバン G15・G31・#3	×	
見本色	×	
リラックス	×	

特殊加工

外径指定	○	※1
プリズム	×	
偏心	×	
カーブ指定	○	※2
UVカット	標準	※3
厚み指定	○	
玉型カット	○	
スライス加工	○	

- ※1 [縮小] (+、MIX範囲) 基準径～最小55mm (1mm単位)
- ※2 (-) S+C=-4.00まで 6カーブ指定可 (-) S+C=-6.00まで 4カーブ指定可
- ※3 UV420

※注 左右商品違いのペア注文は不可。左右別々でご注文ください。

原産国

日本